

GERLED® Professional waterproof LED strip 300 SMD 5050 RGB

BASIC INFORMATIONS

Light colour Colour temperature Voltage Power consumption (5 m/roll) RGB R-630nm,G-525nm,B-470nm 12V DC 5m = 72W

LED DIODES

Type of diod Quantity of LED diodes (1 metr) Quantity of LED diodes (5 metr) Light stream (5m roll) Light angle

SMD 5050 60 300 R-334, B-376, G- 832 120°



BASE

Base type Base colout Cut every Dimensions laminate PCB white 5cm -3 diodes 10mm x 3 mm

OTHER INFORMATIONS


Working time Protection level Working temperature Store temperature Warranty

min. 50 000 h IP 65 od -25°C do +60°C od -20°C do +80°C 24 months

ADDITIONAL INFORMATIONS

Tolerance range for optical and electrical +/- 10%.

Exceeding the voltage leads to an overload, and consequently may be shortening of action, and even damage to the product. Exceeding the storage temperature or temperature can also lead to product failure.

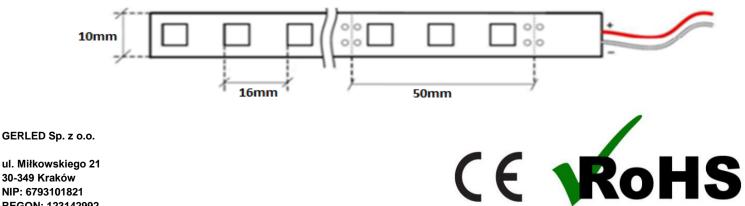

ul. Miłkowskiego 21 30-349 Kraków NIP: 6793101821 REGON: 123142992

