



Taśma GERLED® Professional IP20 SMD 3528 24V

GERLED® Professional LED strip
IP20 SMD 3528 24V

GERLED® Professional striscia LED
IP20 SMD 3528 24V

GERLED® Professional LED-Streifen
IP20 SMD 3528 24V



Podwójna warstwa PCB
Double PCB laminate
PCB a doppio strato
Doppelte PCB-Schicht



Stopień ochrony IP20
Protection class
Grado di protezione (IP)
IP-Klasse



3 lata gwarancji
3 years warranty
3 anni di garanzia
3 Jahre Garantie




Współczynnik oddawania barw
Color rendering index
Indice di resa cromatica (Ra)
Farbwiedergabeindex



Zgodność z CE
CE Compliance
Conformità CE
CE-Zertifikat



Żywotność
Life span
Vitalità
Lebensdauer



Kąt świecenia
Viewing angle
Angolo luminoso
Beleuchtungswinkel



Temperatura pracy
Operational temperature
Temperatura d'esercizio
Arbeitstemperatur



Temperatura magazynowania
Storage temperature
Temperatura di stoccaggio
Lagertemperatur




Zgodność z RoHS
RoHS Compliance
Conformità RoHS
RoHS-Zertifikat

KOD PRODUKTU PRODUCT CODE CODICE PRODOTTO PRODUKTCODE	BARWA LIGHT COLOR COLORE FARBE	TEMPERATURA BARWOWA COLOR TEMPERATURE TEMPERATURA DI COLORE FARBTEMPERATUR	ILOŚĆ DIOD LED QUANTITY NUMERO DIODI ANZAHL DER LEDS	POBÓR MOCY POWER CONSUMPTION POTENZA NENNLEISTUNG	STRUMIEŃ ŚWIETLNY LUMINOUS FLUX FASCIO LUMINOSO LICHSTROM
TGW2033BC	BIAŁY CIEPŁY WARM WHITE BIANCO CALDO WARMWEISS	2900K-3100K	60 LED/m	4,8 W/m	378 lm/m
TGW2036BC			120 LED/m	9,6 W/m	700 lm/m
TGW2033BN	BIAŁY NEUTRALNY NEUTRAL WHITE BIANCO NATURALE NEUTRALWEISS	3900K-4300K	60 LED/m	4,8 W/m	414 lm/m
TGW2036BN			120 LED/m	9,6 W/m	715 lm/m
TGW2033BZ	BIAŁY ZIMNY COOL WHITE BIANCO FREDDO KALTWEISS	6000K-6500K	60 LED/m	4,8 W/m	402 lm/m
TGW2036BZ			120 LED/m	9,6 W/m	750 lm/m
TGW2K33BZ	BIAŁY ZIMNY 12500K COOL WHITE 12500K BIANCO FREDDO 12500K KALTWEISS 12500K	10000K-13000K	60 LED/m	4,8 W/m	344 lm/m
TGW2K36BZ			120 LED/m	9,6 W/m	750 lm/m
TGW2033CZ	CZERWONY/RED/ROSSO/ROT	632 nm	60 LED/m	4,8 W/m	65 lm/m
TGW2033NB	NIEBIESKI/BLUE/BLU/BLAU	455 nm	60 LED/m	4,8 W/m	71 lm/m
TGW2033ZL	ZIELONY/GREEN/VERDE/GRÜN	513 nm	60 LED/m	4,8 W/m	134 lm/m
TGW2033ZO	ŻÓŁTY/YELLOW/GIALLO/GELB	594 nm	60 LED/m	4,8 W/m	79 lm/m
TGW2033FL	FIOLETOWY/PURPLE/VIOLA/VIOLETT	446 - 656 nm	60 LED/m	4,8 W/m	72 lm/m

60 LED/m



sekcja cięcia co 100 mm (6 diod)
cut section every 100 mm (6 diodes)
sezione di taglio ogni 100 mm (6 diodi)
Schnittabschnitt alle 100 mm (6 LEDs)

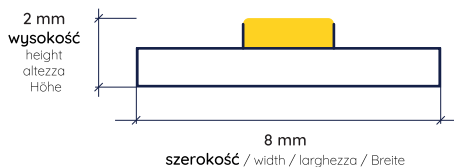

120 LED/m



sekcja cięcia co 50 mm (6 diod)
cut section every 50 mm (6 diodes)
sezione di taglio ogni 50 mm (6 diodi)
Schnittabschnitt alle 50 mm (6 LEDs)

