



Taśma GERLED® Professional IP20 SMD 5025 12V BICOLOR

GERLED® Professional LED strip IP20 SMD 5025 12V BICOLOR GERLED® Professional striscia LED IP20 SMD 5025 12V BICOLOR GERLED® Professional LED-Streifen IP20 SMD 5025 12V BICOLOR



Podwójna warstwa PCB
Double PCB laminate
PCB a doppio laminate
Doppelte PCB-Schicht



IP20
Stoień ochrony IP20
Protection class
Grado di protezione (IP)
IP-Klasse



3 lata
3 lata gwarancji
3 years warranty
3 anni di garanzia
3 Jahre Garantie



CRI >85
Współczynnik oddawania barw
Color rendering index
Indice di resa cromatica (Ra)
Farbwiedergabeindex



Zgodność z CE
CE Compliance
Conformità CE
CE-Zertifikat




min. 50 000 h
Żywotność
Life span
Vitalità
Lebensdauer



180°
Kąt świecenia
Viewing angle
Anglo luminoso
Beleuchtungswinkel



-25°C +60°C
Temperatura pracy
Operational temperature
Temperatura d'esercizio
Arbeitstemperatur



-40°C +80°C
Temperatura magazynowania
Storage temperature
Temperatura di stoccaggio
Lagertemperatur




Zgodność z RoHS
RoHS Compliance
Conformità RoHS
RoHS-Zertifikat

KOD PRODUKTU PRODUCT CODE CODICE PRODOTTO PRODUKTCODE	BARWA LIGHT COLOR COLORE FARBE	TEMPERATURA BARWOWA COLOR TEMPERATURE TEMPERATURA DI COLORE FARBTEMPERATUR	ILOŚĆ DIOD LED QUANTITY NUMERO DIODI ANZAHL DER LEDS	POBÓR MOCY POWER CONSUMPTION POTENZA NENNLEISTUNG	STRUMIEN ŚWIETLNY LUMINOUS FLUX FASCIO LUMINOSO LICHSTROM
05TS12GW01552BIC08	BIAŁY CIEPŁY/NEUTRALNY/ZIMNY WARM/NEUTRAL/COOL WHITE BIANCO CALDO/NATURALE/FREDDO WARMWEISS/NEUTRALWEISS/KALTWEISS	2900K-6500K	30 LED/m	7,2 W/m	550 lm/m
05TS12GW03052BIC08			60 LED/m	14,4 W/m	1020 lm/m

30 LED/m



sekcja cięcia co 100 mm (3 diody)
cut section every 100 mm (3 diodes)
sezione di taglio ogni 100 mm (3 diodi)
Schnittabschnitt alle 100 mm (3 LEDs)

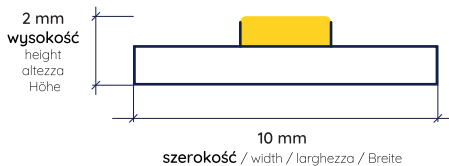

60 LED/m



sekcja cięcia co 50 mm (3 diody)
cut section every 50 mm (3 diodes)
sezione di taglio ogni 50 mm (3 diodi)
Schnittabschnitt alle 50 mm (3 LEDs)

