



Taśma GERLED® Professional NANO SMD 5630 12V

GERLED® Professional LED strip
NANO SMD 5630 12V

GERLED® Professional striscio LED
NANO SMD 5630 12V

GERLED® Professional LED-Streifen
NANO SMD 5630 12V



Podwójna warstwa PCB

Double PCB laminate
PCB a doppio laminate
Doppelte PCB-Schicht



Stopień ochrony NANO

Protection class
Grado di protezione (IP)
IP-Klasse



3 lata

3 lata gwarancji

3 years warranty
3 anni di garanzia
3 Jahre Garantie



CRI >85

Współczynnik oddawania barw
Color rendering index
Indice di resa cromatica (Ra)
Farbwiedergabeindex



Zgodność z CE


CE Compliance
Conformità CE
CE-Zertifikat



min.
50 000 h

Żywotność

Life span
Vitalità
Lebensdauer



180°

Kąt świecenia

Viewing angle
Angolo luminoso
Beleuchtungswinkel



-25°C ÷ 60°C

Temperatura pracy

Operational temperature
Temperatura d'esercizio
Arbeitstemperatur



-40°C ÷ 80°C

Temperatura magazynowania

Storage temperature
Temperatura di stoccaggio
Lagertemperatur



Zgodność z RoHS

RoHS Compliance
Conformità RoHS
RoHS-Zertifikat


KOD PRODUKTU PRODUCT CODE CODICE PRODOTTO PRODUKTCODE	BARWA LIGHT COLOR COLORE FARBE	TEMPERATURA BARWOWA COLOR TEMPERATURE TEMPERATURA DI COLORE FARBTEMPERATUR	ILOŚĆ DIOD LED QUANTITY NUMERO DIODI ANZAHL DER LEDS	POBÓR MOCY POWER CONSUMPTION POTENZA NENNLEISTUNG	STRUMIEŃ ŚWIETLNY LUMINOUS FLUX FASCIO LUMINOSO LICHSTROM
05TS12GN03056BC008	BIAŁY CIEPŁY WARM WHITE BIANCO CALDO WARMWEISS	2900K-3100K	60 LED/m	14,4 W/m	1710 lm/m
05TS12GN06056BC008			120 LED/m	28,8 W/m	2663 lm/m
05TS12GN03056BN008	BIAŁY NEUTRALNY NEUTRAL WHITE BIANCO NATURALE NEUTRALWEISS	3900K-4300K	60 LED/m	14,4 W/m	1762 lm/m
05TS12GN06056BN008			120 LED/m	28,8 W/m	2945 lm/m
05TS12GN03056BZ008	BIAŁY ZIMNY COOL WHITE BIANCO FREDDO KALTWEISS	6000K-6500K	60 LED/m	14,4 W/m	1850 lm/m
05TS12GN06056BZ008			120 LED/m	28,8 W/m	2780 lm/m

60 LED/m



sekcja cięcia co 50 mm (3 diody)
cut section every 50 mm (3 diodes)
sezione di taglio ogni 50 mm (3 diodi)
Schnittabschnitt alle 50 mm (3 LEDs)

2mm
wysokość
height
altezza
Höhe

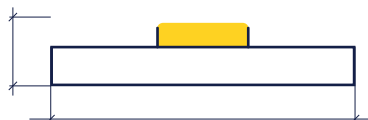

8mm

szerokość/ width / larghezza / Breite

120 LED/m



sekcja cięcia co 50 mm (6 diod)
cut section every 50 mm (6 diodes)
sezione di taglio ogni 50 mm (6 diodi)
Schnittabschnitt alle 50 mm (6 LEDs)

2mm
wysokość
height
altezza
Höhe



16mm

szerokość/ width / larghezza / Breite